

ALUMINUM ELECTROLYTIC CAPACITORS

SHR 7mm 高度 立式 105°C 小型高溫標準品
7mm Height, 105°C Small Size Series


- 高度 7mm 小型高溫品，適用於各式小型化電子產品
- 產品壽命保證 2,000 小時 / 105°C
- For general purpose use with 7mm height.
- Life guaranteed 2,000 hrs./105°C.



• Specifications

Item	Performance Characteristics							
Operating Temperature range 作用溫度範圍	-40 + 105°C							
Rated Voltage 額定電壓	6.3V ~ 50V							
Capacitance Range 容量範圍	0.1 ~ 470 μF							
Capacitance Tolerance 電容容許誤差	±20% (120Hz, 20°C)							
Leakage Current 漏電流	$I \leq 0.01CV$ or $3 \mu A$, whichever is greater after 2 minutes application of rated voltage.							
Dissipation Factor 散熱係數 (120Hz, 20°C)	Rated voltage (V)	4	6.3	10	16	25	35	50
	Tan δ (max.)	0.35	0.24	0.21	0.18	0.15	0.13	0.12
Temperature Characteristics 溫度特性 (120Hz)	Impedance Ratio / Stability at Low Temperature							
	Rated voltage (V)	4	6.3	10	16	25	35	50
	Z (-25°C) / Z (20°C)	6	3	2	2	2	2	2
Load Life 高溫負荷特性	Z (-40°C) / Z (20°C)	12	6	5	4	3	3	3
	After 2,000 hours application of WV at 105°C, capacitor shall meet the characteristics requirements mentioned below.							
	Capacitance change	Within ±20% of initial value						
Shelf Life 摱置壽命	Tan δ	200% or less of initial specified value						
	Leakage current	Initial specified value or less						
After leaving capacitors under no load at 105°C for 1,000 hours and applying voltage according to JIS C5102 and C5141, they shall meet the specified value as load life characteristics listed above.								

• Dimension

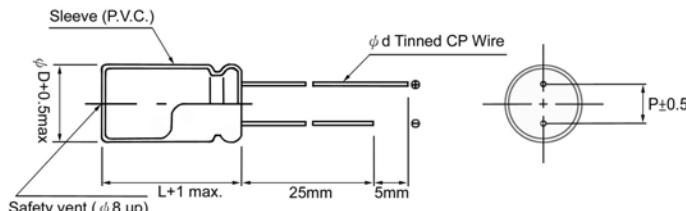

Dφ	4	5	6	8
P	1.5	2.0	2.5	3.5
φd	0.45	0.45	0.45	0.5

• Size & ripple current

Unit: DxL(mm)

WV(SV) Cap(μF)	4 (5)	6.3 (10)	10 (13)	16 (20)	25 (32)	35 (44)	50 (63)	
0.1								4 x 7 1
0.22								4 x 7 2.3
0.33								4 x 7 3.5
0.47								4 x 7 5
1								4 x 7 10
2.2								4 x 7 18
3.3								4 x 7 23
4.7							4 x 7 24	4 x 7 26
10				4 x 7 29 4 x 7 31	5 x 7 36	6.3 x 7 44		
22		4 x 7 34 4 x 7 36	4 x 7 38 5 x 7 46	5 x 7 48 6.3 x 7 60	5 x 7 46 6.3 x 7 62	6.3 x 7 55 8 x 7 70	6.3 x 7 58	
33		4 x 7 38 4 x 7 40	4 x 7 5 x 7 48	5 x 7 59 6.3 x 7 68	5 x 7 59 6.3 x 7 72	6.3 x 7 68 8 x 7 88	6.3 x 7 72 8 x 7 120	
47	4 x 7 38 4 x 7 44	5 x 7 50 5 x 7 55	5 x 7 59 6.3 x 7 68	5 x 7 59 6.3 x 7 72	6.3 x 7 68 8 x 7 120	6.3 x 7 72 8 x 7 120	6.3 x 7 72 8 x 7 120	
100	4 x 7 48 5 x 7 72	5 x 7 80 5 x 7 92	5 x 7 8 x 7 112	5 x 7 8 x 7 112	6.3 x 7 8 x 7 120	6.3 x 7 8 x 7 120	6.3 x 7 8 x 7 120	
220	6.3 x 7 90 6.3 x 7 112	6.3 x 7 120 8 x 7 146	6.3 x 7 8 x 7 162	6.3 x 7 8 x 7 162	6.3 x 7 8 x 7 180	6.3 x 7 8 x 7 180	6.3 x 7 8 x 7 180	
330	8 x 7 142 8 x 7 150	8 x 7 162 8 x 7 180	8 x 7 8 x 7 230	8 x 7 8 x 7 230	8 x 7 8 x 7 230	8 x 7 8 x 7 230	8 x 7 8 x 7 230	Case Size ripple
470	8 x 7 210 8 x 7	8 x 7 230						

Ripple (mA) at 105°C 120Hz